


不锈钢弹簧定位螺丝规格表




类型		本体		顶杆		弹簧	使用温度
		材质	硬度	材质	硬度		
不锈钢顶针	轻负荷用	PJLW	SUS304	SUS440C	HRC55以上	SUS631	-30~260℃
	重负荷用	PJHW					
	极重负荷用	PJXW					
树脂顶针	轻负荷用	PJLK	工程塑料	-	-	-	-30~80℃
	重负荷用	PJHK					
	极重负荷用	PJXK					

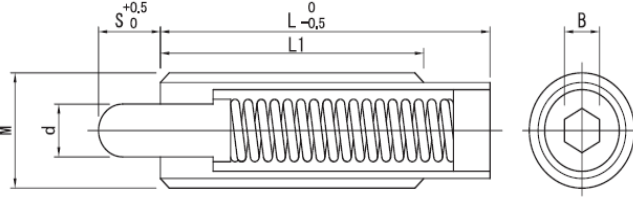

型号	M (普通)	S	d	L1	L	B	负荷 (N)					
							轻负荷用		重负荷用		极重负荷用	
							min	max	min	max	min	max
PJLW	3	1.5	1.1	15	15	0.9	0.4	1.3	0.8	2.9	1.1	3.4
		3					0.2	1.3	0.6	2.9	0.8	3.4
	4	4	1.6	24	24	1.3	0.9	2.0	2	8.8	6.1	13.8
PJHW	5	3	2	20	20	1.5	0.6	2.1	1.9	8.8	5.8	13.6
		5					1.1	10.3	1	17.1	5.7	21.5
PJXW	6	3	2.5	25	25	2	6	9.8	8	26.4	15.8	35.6
		5					3.4	9.9	4.4	26.6	12.9	34.4
PJLK	8	3	3.1	25	25	2.5	6	9.9	14.7	27	21.9	36.3
		5					4	9.8	6.7	26.6	144.7	34.5
PJHK	10	5	3.8	30	30	3	5.7	14.7	8.2	45.7	24.5	58.6
		10					4.4	14.7	6.2	45.1	19.8	58.7
PJXK	12	5	5.5	30	30	4	5.9	14.7	18.2	49	34.9	63.6
		10					5	14.7	7.8	49	25.5	63.6
	15	6.9	14.7	7.5	49	20.1	63.7					
	10	9.2	34.2	18.9	68.5	38.7	88.4					
	15	8.6	34.2	14.4	68.6	33.9	88.1					
20	7.1	34.2	4.2	68.6	25.4	88.1						

带法兰弹簧定位螺栓

类型		本体			顶杆			弹簧
		材质	硬度	表面处理	材质	硬度	表面处理	
轻负荷用	FPJL	S45C	HRC29~38	发黑	S45C	HRC57~63	镀锌	SWP-B
重负荷用	FPJH				工程塑料	渗碳淬火	发黑	
轻负荷用	FNPJL				工程塑料	-	-	

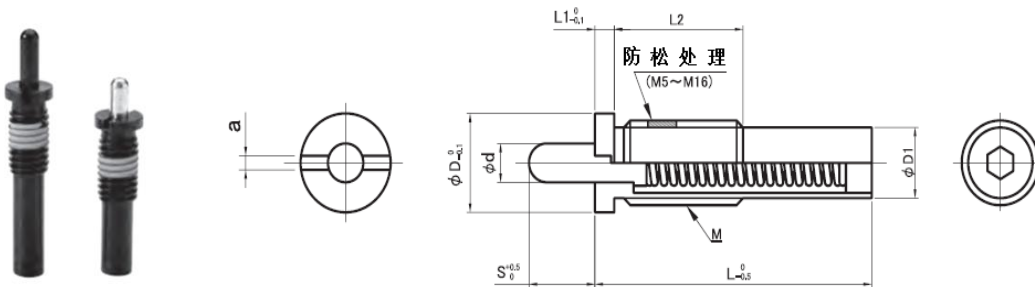

型号	M-S	MXP	S	d	L	L1	L2	D1	D	a	轻负荷用 (FPJL/FNPJL)		重负荷用 (FPJH)	
											min	max	min	max
											FPJL FPJH FNPJL	3-1.5*	3X0.5	1.5
3-3*	3X0.5	3	1.1	15	1.5	5	2.35	5	0.5	0.29		1	0.78	2.9
4-2*	4X0.7	2	1.6	15	1.8	6	3.1	6	0.7	1		2	2.9	8.8
4-4*	4X0.7	4	1.6	24	1.8	6	3.1	6	0.7	0.59		2	2	8.8
5-3*	5X0.8	3	2	20	2	8	3.8	7	1.2	2		9.8	4.9	19.6
5-5*	5X0.8	5	2	27	2	8	3.8	7	1.2	2		9.8	2.9	19.6
6-3*	6X1	3	2.5	25	2.5	9	4.7	8	1.5	5.9		9.8	7.8	29.4
6-5*	6X1	5	2.5	30	2.5	9	4.7	8	1.5	2		9.8	4.9	29.4
8-3*	8X1.25	3	3.1	26	2.5	12	6.1	10	1.5	5.9		9.8	14.7	29.4
8-5*	8X1.25	5	3.1	27	2.5	12	6.1	10	1.5	2.9		9.8	7.8	29.4
10-5*	10X1.5	5	3.8	30	2.5	15	7.5	12	1.5	5.9		14.7	8.8	49
10-10*	10X1.5	10	3.8	43	2.5	15	7.5	12	1.5	2.9		14.7	7.8	49
12-5*	12X1.75	5	5.5	30	3	15	9.2	14	2	5.9		14.7	18.6	49
12-10*	12X1.75	10	5.5	43	3	20	9.2	14	2	2.9		19.6	7.8	49
12-15*	12X1.75	15	5.5	51	3	20	9.2	14	2	2.9		19.6	4.9	49
16-10*	16X2	10	8	60	3	25	13	18	2	5.9		39.2	12.7	78.5
16-15*	16X2	15	8	60	3	25	13	18	2	3.9		39.2	12.7	78.5
16-20*	16X2	20	8	85	3	25	13	18	2	4.9		39.2	9.8	78.5
16-30*	16X2	30	8	125	3	25	13	18	2	2.9		39.2	6.9	78.5
16-40	16X2	40	8	125	3	25	13	18	2	4.9		39.2	6.9	78.5

FNPJL只有带*的规格